



# Accessory

## Wireless Remote Control

### WiZ Pro Remote Control



The WiZ Pro Remote control enables direct control of any WiZ Pro, WiZ Connected, or "Connected by WiZ" device without going through your Wi-Fi router. This accessory controls one or several devices by broadcasting a Wi-Fi message directly to the device. Once the accessory is setup via the WiZ Pro Setup app or the WiZ App, it will be able to control the devices even in the absence of Wi-Fi and the internet.

Furthermore, via the WiZ Pro dashboard, it is possible to target multiple rooms, or multiple devices (independently from the room structure). It is also possible to target a few devices in a room with this remote control.

## SPECIFICATIONS

POWER SOURCE	BATTERY LIFE (YEARS)*	CONTROL RANGE (M / FT)*	RADIO PROTOCOL	ENVIR. PROTECTION RATING	OPERATING TEMPERATURE (°C)
2 x LR03 AAA Alkaline Zn-MnO <sub>2</sub>	1	15 / 30	Wi-Fi / 2.4 GHz	Indoor / IP20	-10 ~ 50

\*Based on approximately 30 button presses per day.


\* In a normal indoor environment with partitions and walls.

## ORDERING INFORMATION


PRODUCT NAME	12 NC	6 NC	PIECES PER CASE
WiZ Pro Remote Control	929002551273	604462	6



## BUTTONS FUNCTIONAL DESCRIPTIONS

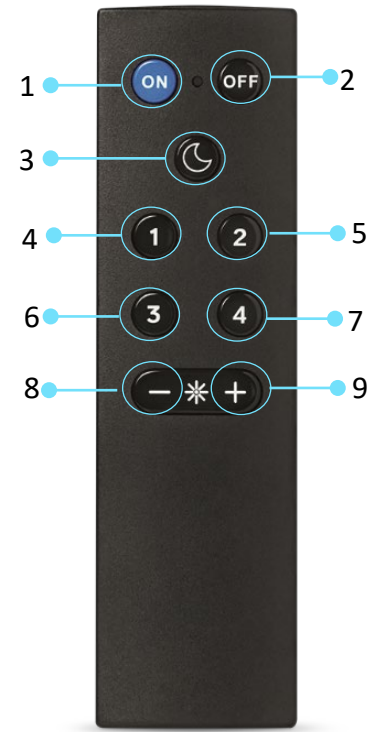

#	FUNCTION
1	On – Press to turn on the light
2	Off – Press to turn off the light
3	Night Light – Press to change to Night Light scene
4	Scene 1 – Press to change to Scene 1 defined in the lamp
5	Scene 2 – Press to change to Scene 2 defined in the lamp
6	Scene 3 – Press to change to Scene 3 defined in the lamp
7	Scene 4 – Press to change to Scene 4 defined in the lamp
8	Dim Down – Press or hold to decrease the brightness of the lamp
9	Dim Up – Press or hold to increase the brightness of the lamp

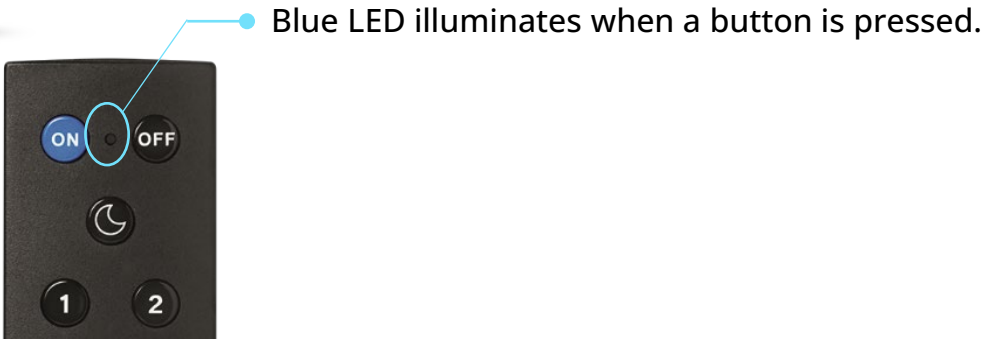

## WIRELESS INTERFACE

ITEM	VALUE	UNIT	CONDITIONS
Communication Method	Wi-Fi		
Wi-Fi Frequency	2412 – 2462	MHz	
Wi-Fi Transmission Power	20	dBm	

# WiZ Pro Remote Control

## DIMENSIONS

Weight: 35 g.



## WiZ Pro Remote Control

### APPLICATION NOTES

- One device can react to the commands of up to 10 accessories.
- Ambient Temperature range is between -10 °C to +50°C.
- Do not use this product in applications where it is directly exposed to water.
- Modifications of the product voids the limited warranty.
- For warranty information, please visit [www.signify.com/warranties](http://www.signify.com/warranties).

### SOFTWARE / APPS

Please scan the QR code for instructions download the WiZ Pro Setup app and the WiZ App.



[www.wizconnected.com/pro](http://www.wizconnected.com/pro)



## RF COMPLIANCE / DISCLAIMER / EXPOSURE STATEMENTS

This device complies with Part15 of the FCC Rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

- Wi-Fi®, the Wi-Fi logo, the Wi-Fi CERTIFIED logo are registered trademarks of the Wi-Fi Alliance.
- WPA™, WPA2™, WPA3™ are trademarks of the Wi-Fi Alliance.
- The Bluetooth® word and logos are registered trademarks owned by the Bluetooth SIG, Inc.
- Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.
- Google, Google Play and the Google Play logo are the trademark of Google LLC.
- The Apple logo and Siri are the registered trademark of Apple Inc.
- Any use of such marks by Signify is under license. Other trademarks and trade names are those of their respective owners.

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

WiZ is a global brand of



© 2022 Signify Holding. All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. All trademarks are owned by Signify Holding or their respective owners.

Signify North America  
Corporation  
200 Franklin Square Drive,  
Somerset, NJ 08873  
Telephone 855-486-2216

Signify Canada Ltd.  
281 Hillmount Road,  
Markham, ON, Canada L6C3  
Telephone 800-668-9008

[www.wizconnected.com/pro](http://www.wizconnected.com/pro)